



POMPE A GIRANTE ELASTICA PER RAFFREDDAMENTO MOTORE

POMPA Tipo : FPR 069 – Con tenuta meccanica -
CODICE : 0481
*** Service KIT : 5334**
JOHNSON : F5B-9-10-13392-01-02-Senza tenuta meccanica

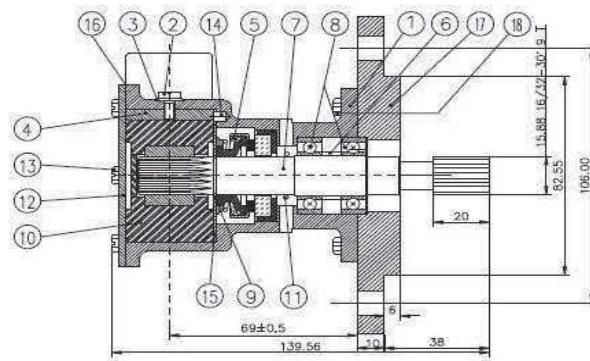

| | 700 rpm | 900 rpm | 1400 rpm | 1750 rpm | 2000 rpm | 2500 rpm |
|------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Bar | l/min | l/min | l/min | l/min | l/min | l/min |
| 0 | 21 | 27 | 41 | 49 | 56 | 60 |
| 0,3 | 19 | 25 | 38 | 47 | 54 | 57 |
| 0,6 | 18 | 23 | 37 | 42 | 48 | 55 |
| 1 | 16 | 20 | 32 | 36 | 41 | 48 |
| 1,4 | 10 | 13 | 25 | 29 | 34 | 40 |

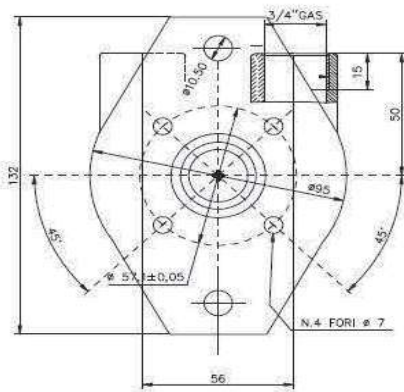

APPLICAZIONI :

BONI Motonautica :
ISUZI : 3KNA – 4KNA

08/01/2014

| Pezzo | Quantità | Descrizione | Description | Codice |
|-------|----------|------------------|-----------------|--------|
| 18 | 4 | VITE | SCREW | 3776 |
| 17 | 1 | Flangia | Flange | 4080 |
| 16 | 1 | GUARNIZIONE | Gsket | 1965 |
| 15 | 1 | RASAMENTO | Shim | 1801 |
| 14 | 1 | SPINA | Pin | 1522 |
| *13 | 6 | VITE | Screw | 1406 |
| *12 | 1 | COPERCHIO | Cover | 1838 |
| 11 | 1 | ANELLO OR | O-Ring | 5204 |
| *10 | 1 | GIRANTE | Impeller | 1393 |
| 9 | 1 | SEEGER | Retaining ring | 1616 |
| 8 | 2 | CUSCINETTO | Ball bearing | 2066 |
| 7 | 1 | ALBERO | Shaft | 3887 |
| 6 | 1 | DISTANZIALE | SPACER | 2307 |
| *5 | 1 | TENUTA MECCANICA | Mechanical seal | 1135 |
| *4 | 1 | CAMMA | Cam | 1818 |
| *3 | 1 | RONDELLA | Washer | 1440 |
| *2 | 1 | VITE PER CAMMA | Screw | 1441 |
| 1 | 1 | CORPO POMPA | Body | 2012 |